



1 Oak Frosti

5 Oak Joris

2 Oak Frijó

6 Oak Sanjo

3 Oak Kari

4 Oak Kimi

ondo NATURAL
WOOD
FLOORING
by Admonter

Data sheets

Admonter Holzindustrie AG | Sägestraße 539 | 8911 Admont |
www.ondo-naturholzboden.at

OAK FROSTI

Top layer approx. 2,5 mm

Maintenance oil white



No initial oil treatment is required!

Further information about our products can be found in our Ondo maintenance and installation instructions or at admonter.at.



Ondo FLOORs on underfloor heating systems

Ondo FLOORs are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation. We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet Ondo FLOORs on underfloor heating systems!

Admonter accessories

The wide range of accessories matches the Ondo FLOORs and includes flush-mount skirting and solutions for staircases.

Regular care and maintenance

Please see the Ondo maintenance & installation instructions or visit www.ondo-naturholzboden.at.

Grading	Thickness (mm)	Constructuion	Width (mm)		Length (mm)	Texture	Finish	Profile
calm	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
placid	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
vivid	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove

Backing: Solid Wood / ec: natural oiled easy care

Ondo by Admonter is a 100 % natural product. A picture is never a substitute for the „real thing“. For this reason we recommend a visit to your nearest Ondo flooring dealer. He will be pleased to show you samples.


Technical information							
More information (for example concerning fire classification) in the accompanying information to CE-marking at http://www.admonter.com/en/downloads/							
Type of wood	Thickness (mm)	Weight [kg/m²]	Moisture content [%]	Lambda [W/m K]	d-Value R [m² K/W]	Hardness [N/mm²]	Fire classification
Oak	13	6,7	7+/-2	0,13	0,098	41	C _s -s1



OAK FRIJO

Top layer approx. 2,5 mm

Maintenance oil white

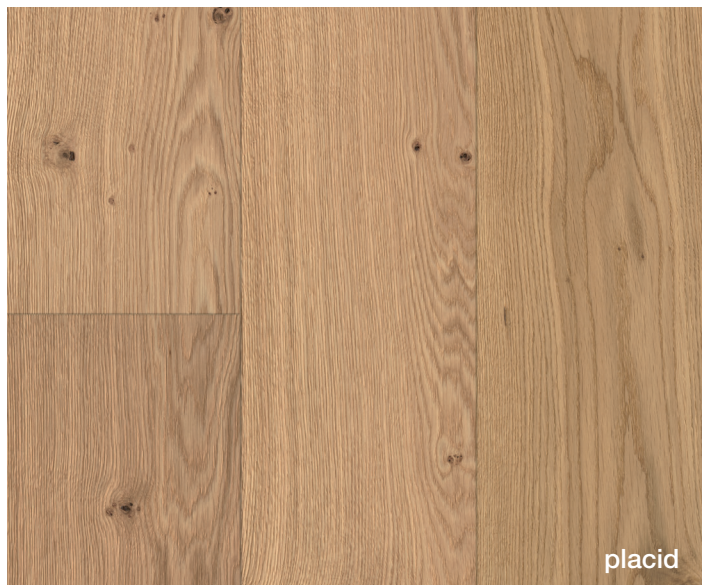

No initial oil treatment is required!

Further information about our products can be found in our Ondo maintenance and installation instructions or at admonter.at.



Ondo FLOORs on underfloor heating systems

Ondo FLOORs are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation. We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet Ondo FLOORs on underfloor heating systems!

Admonter accessories

The wide range of accessories matches the Ondo FLOORs and includes flush-mount skirting and solutions for staircases.

Regular care and maintenance

Please see the Ondo maintenance & installation instructions or visit www.ondo-naturholzboden.at.

Grading	Thickness (mm)	Constructuion	Width (mm)		Length (mm)	Texture	Finish	Profile
calm	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
placid	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
vivid	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove

Backing: Solid Wood / ec: natural oiled easy care

Ondo by Admonter is a 100 % natural product. A picture is never a substitute for the „real thing“. For this reason we recommend a visit to your nearest Ondo flooring dealer. He will be pleased to show you samples.

Technical information							
More information (for example concerning fire classification) in the accompanying information to CE-marking at http://www.admonter.com/en/downloads/							
Type of wood	Thickness (mm)	Weight [kg/m²]	Moisture content [%]	Lambda [W/m K]	d-Value R [m² K/W]	Hardness [N/mm²]	Fire classification
Oak	13	6,7	7+/-2	0,13	0,098	41	C _s -s1



OAK KARI

Top layer approx. 2,5 mm

Maintenance oil



No initial oil treatment is required!

Further information about our products can be found in our Ondo maintenance and installation instructions or at admonter.at.



Ondo FLOORs on underfloor heating systems

Ondo FLOORs are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation. We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet Ondo FLOORs on underfloor heating systems!

Admonter accessories

The wide range of accessories matches the Ondo FLOORs and includes flush-mount skirting and solutions for staircases.

Regular care and maintenance

Please see the Ondo maintenance & installation instructions or visit www.ondo-naturholzboden.at.

Grading	Thickness (mm)	Constructuion	Width (mm)		Length (mm)	Texture	Finish	Profile
calm	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
placid	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
vivid	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove

Backing: Solid Wood / ec: natural oiled easy care

Ondo by Admonter is a 100 % natural product. A picture is never a substitute for the „real thing“. For this reason we recommend a visit to your nearest Ondo flooring dealer. He will be pleased to show you samples.

Technical information							
More information (for example concerning fire classification) in the accompanying information to CE-marking at http://www.admonter.com/en/downloads/							
Type of wood	Thickness (mm)	Weight [kg/m²]	Moisture content [%]	Lambda [W/m K]	d-Value R [m² K/W]	Hardness [N/mm²]	Fire classification
Oak	13	6,7	7+/-2	0,13	0,098	41	C _s -s1



OAK KIMI

Top layer approx. 2,5 mm

Maintenance oil white



No initial oil treatment is required!

Further information about our products can be found in our Ondo maintenance and installation instructions or at admonter.at.



Ondo FLOORs on underfloor heating systems

Ondo FLOORs are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation. We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet Ondo FLOORs on underfloor heating systems!

Admonter accessories

The wide range of accessories matches the Ondo FLOORs and includes flush-mount skirting and solutions for staircases.

Regular care and maintenance

Please see the Ondo maintenance & installation instructions or visit www.ondo-naturholzboden.at.

Grading	Thickness (mm)	Construction	Width (mm)		Length (mm)	Texture	Finish	Profile
calm	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
placid	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
vivid	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove

Backing: Solid Wood / ec: natural oiled easy care

Technical information


More information (for example concerning fire classification) in the accompanying information to CE-marking at <http://www.admonter.com/en/downloads/>

Type of wood	Thickness (mm)	Weight [kg/m²]	Moisture content [%]	Lambda [W/m K]	d-Value R [m² K/W]	Hardness [N/mm²]	Fire classification
Oak	13	6,7	7+/-2	0,13	0,098	41	C _s -s1



OAK JORIS

Top layer approx. 2,5 mm
lightly smoked
Maintenance oil white

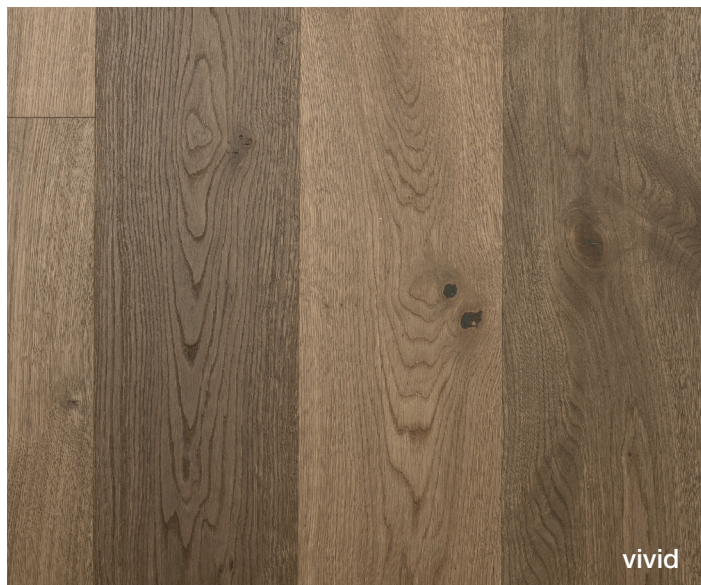

No initial oil treatment is required!

Further information about our products can be found in our Ondo maintenance and installation instructions or at admonter.at.



Ondo FLOORs on underfloor heating systems

Ondo FLOORs are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation. We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet Ondo FLOORs on underfloor heating systems!

Admonter accessories

The wide range of accessories matches the Ondo FLOORs and includes flush-mount skirting and solutions for staircases.

Regular care and maintenance

Please see the Ondo maintenance & installation instructions or visit www.ondo-naturholzboden.at.

Grading	Thickness (mm)	Construction	Width (mm)		Length (mm)	Texture	Finish	Profile
placid	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
vivid	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove

Backing: Solid Wood / ec: natural oiled easy care

Technical information

More information (for example concerning fire classification) in the accompanying information to CE-marking at <http://www.admonter.com/en/downloads/>

Type of wood	Thickness (mm)	Weight [kg/m²]	Moisture content [%]	Lambda [W/m K]	d-Value R [m² K/W]	Hardness [N/mm²]	Fire classification
Oak	13	6,7	7+/-2	0,13	0,098	41	C _s -s1



OAK SANJO

Top layer approx. 2,5 mm

Maintenance oil



placid

No initial oil treatment is required!

Further information about our products can be found in our Ondo maintenance and installation instructions or at admonter.at.



Ondo FLOORs on underfloor heating systems

Ondo FLOORs are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation. We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet Ondo FLOORs on underfloor heating systems!

Admonter accessories

The wide range of accessories matches the Ondo FLOORs and includes flush-mount skirting and solutions for staircases.

Regular care and maintenance

Please see the Ondo maintenance & installation instructions or visit www.ondo-naturholzboden.at.

Grading	Thickness (mm)	Construction	Width (mm)		Length (mm)	Texture	Finish	Profile
placid	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
vivid	13	3-layer	158	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove
			192	classic	2000 / 2400	brushed	ec	lock-it / Tongue & groove

Backing: Solid Wood / ec: natural oiled easy care

Technical information

More information (for example concerning fire classification) in the accompanying information to CE-marking at <http://www.admonter.com/en/downloads/>

Type of wood	Thickness (mm)	Weight [kg/m²]	Moisture content [%]	Lambda [W/m K]	d-Value R [m² K/W]	Hardness [N/mm²]	Fire classification
Oak	13	6,7	7+/-2	0,13	0,098	41	C _s -s1

