



ondo

by Admonter

NATURAL
WOOD
FLOORING



Dear interior lovers,

Real life does not come from a glossy brochure. How would you like a real wood floor? One that can cope with the challenges of real life and still looks good year after year? You have found what you are looking for: Ondo natural wood floors by Admonter - **you'll enjoy living together!**

Engineered wood flooring 100% manufactured in Austria

ondo is a beautiful, natural product with unique characteristics. There are planks with lighter and darker colour tones, soft and strong grain patterns. Just like nature.

calm



placid



vivid



Oak

THE FOLLOWING QUALITY CHARACTERISTICS
ARE THE SAME FOR ALL GRADINGS.



DESCRIPTION	<ul style="list-style-type: none">• 3 gradings: calm, placid, vivid• 16 products• 100 % made in Austria• origin of the wood: Europe• no final coat of oil required after installation
CONSTRUCTION	<ul style="list-style-type: none">• 3-layer construction• top layer thickness of approx. 2,5 mm• spruce core• softwood veneer backing
SURFACE TEXTURE	<ul style="list-style-type: none">• brushed
FINISH	<ul style="list-style-type: none">• natural oiled easy care
GRADINGS - COLOUR OF FILLER	<ul style="list-style-type: none">• calm – soft structural appearance with only a few knots, filled with a brown filler• placid – knotty grading, filled with a brown filler• vivid – knotty rustic grading, surface full of natural character, filled with a black filler
FORMAT	<ul style="list-style-type: none">• 13 x 158 x 2000 / 2400 mm• 13 x 192 x 2000 / 2400 mm
INSTALLATION SYSTEM	<ul style="list-style-type: none">• tongue & groove• lock-it

NO FINAL COAT OF OIL REQUIRED AFTER INSTALLATION!
You'll find further information in the ondo maintenance & installation instructions and at www.ondo-naturholzboden.at

All floors of the ondo range are ideally suited for under-floor heating systems. In this case, we suggest a full surface stick down installation with Admonter elastic adhesive. We recommend hot-water underfloor heating systems set at low temperature. ondo can also be installed as a floating floor. More information at www.ondo-naturholzboden.at

SKIRTING

- Type 1 - approx. 16 x 40 x 2000/2400 mm - massive solid wood
- Type 2D - approx. 15 x 35 x 1980 mm - solid wood (made from planks)
- Type 3 - approx. 16 x 40 x 2400 mm - Veneered skirting with spruce base material

ADHESIVE

- high quality, solvent free adhesive
- easy to spread

CARE & MAINTENANCE

The durability and wear resistance of any wood floor is highly dependent on regular, correct care and maintenance, which if carried out correctly, will add years to the life of your floor. For care & maintenance we recommend our cleaning products. You will find more information in our laying & maintenance instructions and at www.ondo-naturholzboden.at

TIP

It is particularly important to sort the individual planks by colour prior to installation. In doing this, it is possible to deliberately influence the overall appearance of the room. An even, homogenous effect can be created by merging planks with similar tones. However, by placing planks with lighter and darker tones alongside each other, the contrast will create a rustic effect. Indeed, it is possible to create diverse effects depending on how the floor planks are installed.

We grant a 20 year warranty on hidden defects in the floor based on material and manufacturing defects.

ondo natural wood flooring is a 100 % natural product. A picture is never a substitute for the „real thing“. For this reason we recommend a visit to your nearest ondo by Admonter flooring dealer.

Admonter finish **easy care** resists the strongest stress caused by micro-scratches.

The surface meets the requirement class according to DIN EN 16094.



Feature / Benefit advantages

Valuable wood construction

Warping stability

Diverse constructions available

For every application

Different formats

For any room concept

20 years warranty

safe when buying

Showroom partner ONDO BY ADMONTER

Feature wooden floors ONDO	Benefit
Different colours	Wide range of choices for every customer or area of application
Different profiles/installation systems	The right product for every application / processing purpose
Differnt widths can be laid together	Great appearance of the floor in large rooms
Admonter solid wood construction for 3-layer floors (top layer, perpendicular middle layer, backside)	Rigid against torsion -> the floor lies flatter and the position of joints is reduced, even with wide plank flooring






01/ Oak Frosti calm




02/ Oak Frijó calm

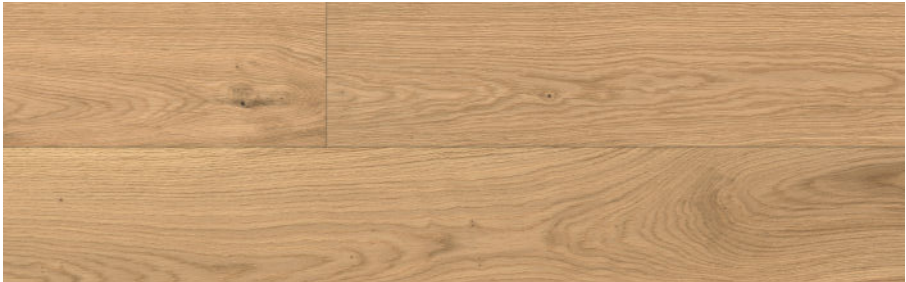

03/ Oak Kari calm



04/ Oak Kimi calm

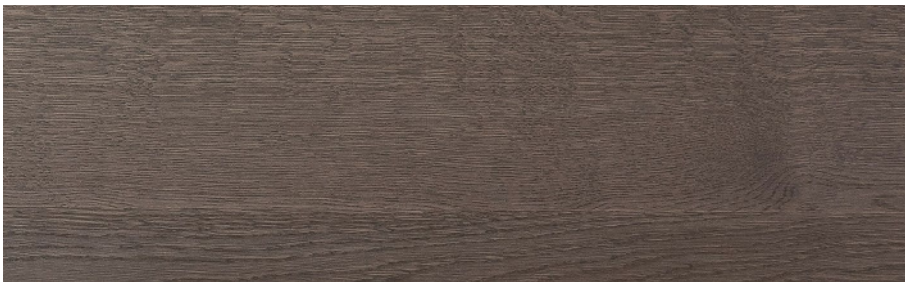

calm





01/ Oak Frosti placid




02/ Oak Frijo placid




03/ Oak Kari placid



04 Oak Kimi placid

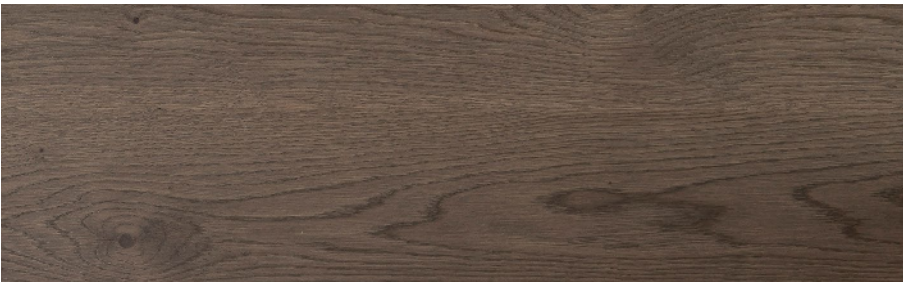

05 Oak Joris placid

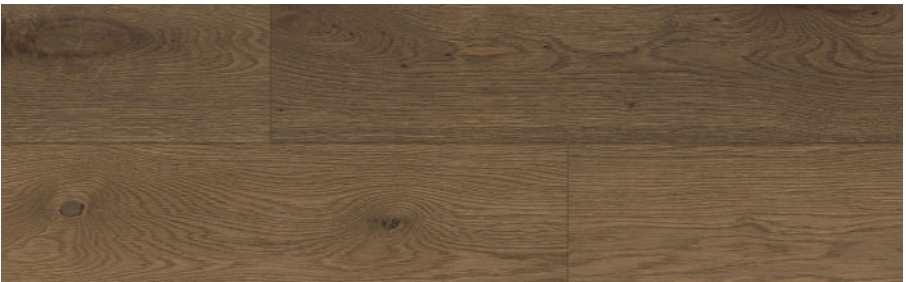

06 Oak Sanjo placid



01/ Oak Frosti vivid



02/ Oak Frijol vivid



03/ Oak Kari vivid



04/ Oak Kimi vivid



05/ Oak Joris vivid



06/ Oak Sanjo vivid





ondo NATURAL
WOOD
FLOORING
by Admonter

ondo by Admonter

Admonter Holzindustrie AG
Sägestraße 539, 8911 Admont, Austria
+43 (0) 3613 / 3350-0, ondo@admonter.at
www.ondo-naturholzboden.at

